


Salvaterrazza

CONSOLIDANT PROTECTIVE

FILA[®]
floor care products

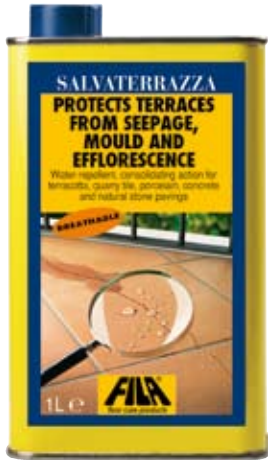

TERRACOTTA

QUARRY TILES

PORCELAIN
STONEWARE

UNPOLISHED MARBLE
AND AGGLOMERATES

CONCRETE

WHAT IT'S FOR

- It protects and repairs terraces in terracotta, quarry tiles, porcelain, concrete, natural stone, composites from water and moisture.
- It penetrates into the material, consolidating the surface.
- It eliminates the problem of water seepage, preventing the formation of mould and efflorescence, not to mention serious structural damage.
- It protects grouts.
- It penetrates into cracks from 0.5 µm to 1 mm deep, making them water-repellent.

ADVANTAGES

- It does not create a surface film and allows the material to breathe.
- Simple to use, ready straight from the can.
- Easy to spread, quick-acting.
- Does not yellow despite environmental conditions or ageing.
- High coverage.

HOW IT WORKS



Salvaterrazza eliminates the problem of water seepage, which creates mould and efflorescence, with structural damage to follow once temperatures fall below zero. It penetrates into the crack and forms a chemical bond with the material, making it firmer and more compact.



Salvaterrazza repels water but lets the material breathe, without creating a surface film of any kind.



HOW IT'S USED

No dilution: ready to use.

Application:

Using a paintbrush, a roller or other applicator, apply Salvaterrazza onto the clean, dry paving, spreading evenly over the entire surface and making sure that joints and cracks receive plenty of attention. Within 5 minutes the material must be completely dried up and the excess of product must be removed rubbing the surface with a dry cloth or a paper towel. On particularly absorbent materials such as sandstone, limestone, terracotta and concrete, apply a second coat 24 hours after the first. The paving can be walked over 24 hours after the final coat.

Caution:

The product can tone up the material, first spot test a small area to check for any changes in colour.

COVERAGE

With one litre:

10/15 m²

"Coverage rates are approximate and refer to a single coat of the product"

Packaging

1 litre cans in box of 12.
5 litre cans in box of 4.

COMPOSITION

Blend of siloxane compounds dispersed in de-aromatized hydrocarbon solvent.

Storage temperature: between 0° C and 30° C.
Must be applied to material at temperatures between 5 and 30° C.

LABELLING

Symbol

St Andrew's cross

Risk phrases

Flammable. Harmful: may cause lung damage if swallowed. Repeated exposure may cause skin dryness or cracking.

Safety phrases

Keep out of the reach of children. Keep away from food, drink and animal feedingstuffs. In case of fire use: earth, sand, chemical powder or foam. If swallowed, do not induce vomiting; seek medical advice immediately and show this container or label.

Contains: de-aromatized mineral turpentine.

According to the legislative decree 161/06. Binding (strengtheners) primers. EU limit value for this product (Cat: 1/h): 750 g/l (2007). This product contains max. 640 g/l.



TECHNICAL INFORMATION

Appearance: liquid

Colour: colourless

Odour: slight odour of hydrocarbon solvent

Density: 0.777 Kg/litre

Flash point: 40°

The information above reflects our latest technical knowhow and is the outcome of ongoing laboratory research and testing. However, some factors are beyond our control. It is essential to integrate our suggestions with your own on-site preliminary tests and check. Fila accepts no liability for improper use of its products.